

3V and 3VX (EXPLOSION-PROOF)

3" Non-clog Wastewater Pumps
Standard (3V) and Explosion-proof (3VX) Construction



MYERS 3V AND 3VX (EXPLOSION-PROOF) SUBMERSIBLE WASTEWATER PUMPS PASS A FULL 2 1/2" SPHERICAL SOLID AND ARE THE IDEAL CHOICE WHEN SELECTING A PUMP FOR YOUR NEXT APPLICATION.

Myers rounded port, 2-vane, enclosed impeller prevents solids from binding or clogging and offer high operating efficiencies to cut your pumping costs. The 3V series modified constant velocity volute case provides smooth operation over an extended portion of the performance curve for extended seal and bearing life. For use in municipal lift stations, treatment plants and industrial waste applications. Myers offers a complete line of wastewater pumps, lift-out rail assemblies, controls and accessories to meet your needs. Call you Myers distributor, or the Myers Ohio sales office at 419-289-1144 for more details.

ADVANTAGES BY DESIGN

HIGH EFFICIENCY HYDRAULIC DESIGN CUTS PUMPING COSTS AND EXTENDS LIFE OF FLUID END COMPONENTS.

- Two-vane, rounded port, enclosed type impeller handles 2 1/2" solids with ease at high operating efficiencies.
- Modified constant velocity volute offers quiet operation, low radial loads over extended portion of performance curve.

DURABLE MOTOR WILL DELIVER MANY YEARS OF RELIABLE SERVICE.

- Oil-filled motor for maximum heat dissipation and constant bearing lubrication.
- Heat sensor thermostats imbedded in windings protect motor from over heat conditions.
- Seal leak probes warn of moisture entry; helps prevent costly motor burnout.
- Double tandem shaft seals prevent sewage from entering motor.
- Power and control cables are double sealed with epoxy and compression grommet.

PRODUCT CAPABILITIES

Capacities To	400 gpm	25.24 lps
Heads To	48 ft.	14.6 m
Solids Handling Capacity	2 1/2 in.	63.5 mm
Liquids Handling	raw unscreened sewage, effluent, storm water	
Intermittent Liquid Temp.	up to 140°F	up to 60°C
Winding Insulation Temp. (Class F)	311°F	155°C
Motor Electrical Data	1750 RPM 1-5 HP, 230V, 1Ø, 60 Hz 1-5 HP, 200/230/460/575V, 3Ø, 60 Hz	
Std. Third Party Approvals	CSA	
Optional Approvals	FM Class 1, Group C & D (3VX only)	
Acceptable pH Range	6 - 9	
Specific Gravity	.9 - 1.1	
Viscosity	28 - 35 SSU	
Discharge (Flange Dim.)	3 in.	76 mm

NOTE: Consult factory for applications outside of these recommendations.

Construction Materials	
Motor Housing, Seal Housing, Cord Cap and Volute Case	cast iron, Class 30 ASTM A48
Enclosed 2-Vane Impeller	ductile iron, Class 65 ASTM A536
Power and Control Cord	25 ft. SOOW
Mechanical Seals Standard Optional	double tandem, type 21 carbon and ceramic lower tungsten, carbide
Pump, Motor Shaft	416 SST
Fasteners	300 series SST
Volute Wear Ring	brass

WHERE INNOVATION MEETS TRADITION

Myers®
Pentair Pump Group

POWER & CONTROL CORDS
SOOW, UL and CSA approved oil-resistant cable.

CABLE ENTRY SYSTEM
Provides double seal protection. Cable jacket sealed by compression grommet. Individual wires sealed by epoxy potting.

HEAT SENSOR
Protects motor from burn-out due to excessive heat from any overload condition. Automatically resets when motor has cooled.

MOTOR STATOR
Heat shrunk into housing for perfect alignment and best heat transfer. Oil-filled motor conducts heat and lubricates bearings.

BALL BEARINGS
Upper and lower ball bearings support shaft and rotor and take axial and radial loads.

SHAFT SEALS
Double tandem mechanical shaft seals protect motor. Oil-filled seal chamber provides continuous lubrications.

SEAL LEAK PROBES
Detect water in seal housing. Activates warning light in control panel. (Test resistor on FM listed pumps only.)

HEAVY 416 SST SHAFT
Corrosion resistant.

SLEEVE BEARING
Takes radial shock load; provides flame path. (FM listed pumps only.)



VOLUTE CASE
Modified constant velocity volute handles 2½" solids. 3" ANSI 125 lb. flange.

HIGH EFFICIENCY IMPELLER
2-vane with rounded ports. Handles 2½" solids. Pump out vanes help keep trash from seal; reduces pressure to seal faces.


BRASS WEAR RING
Prevents rust build-up and reduces leakage and wear. Replaceable to restore original running clearances and pump efficiencies.

DIMENSIONS

[] Dimensions in mm

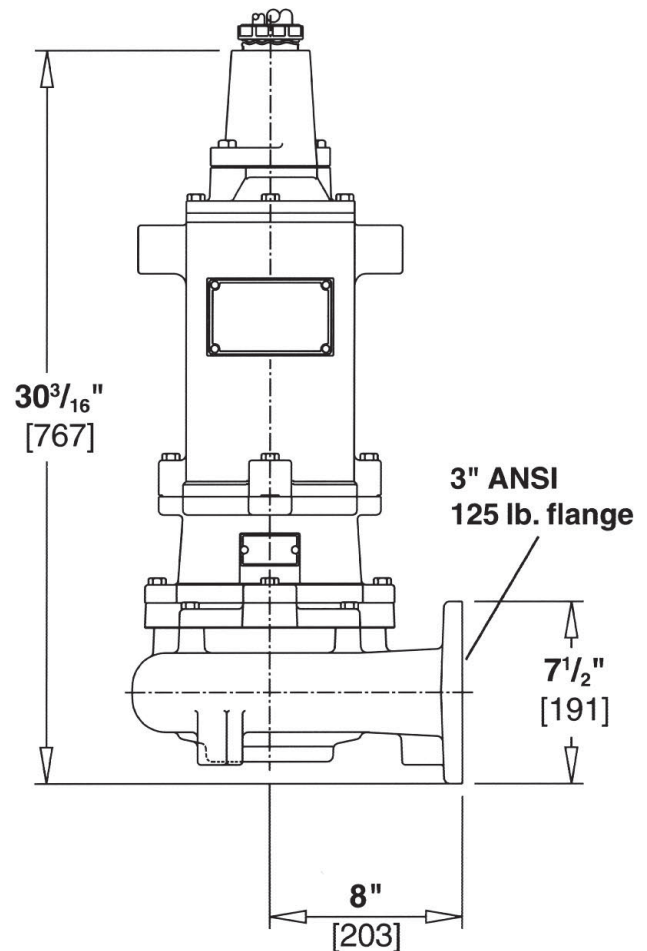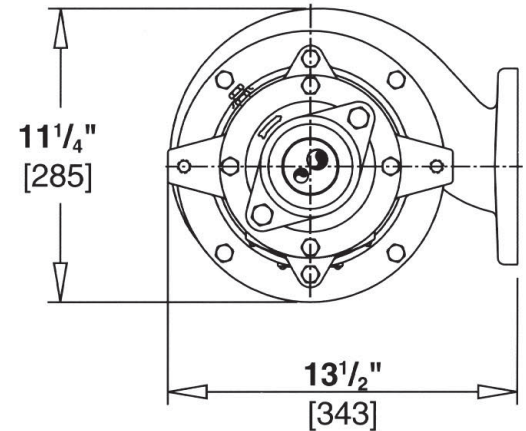

PUMP PERFORMANCE

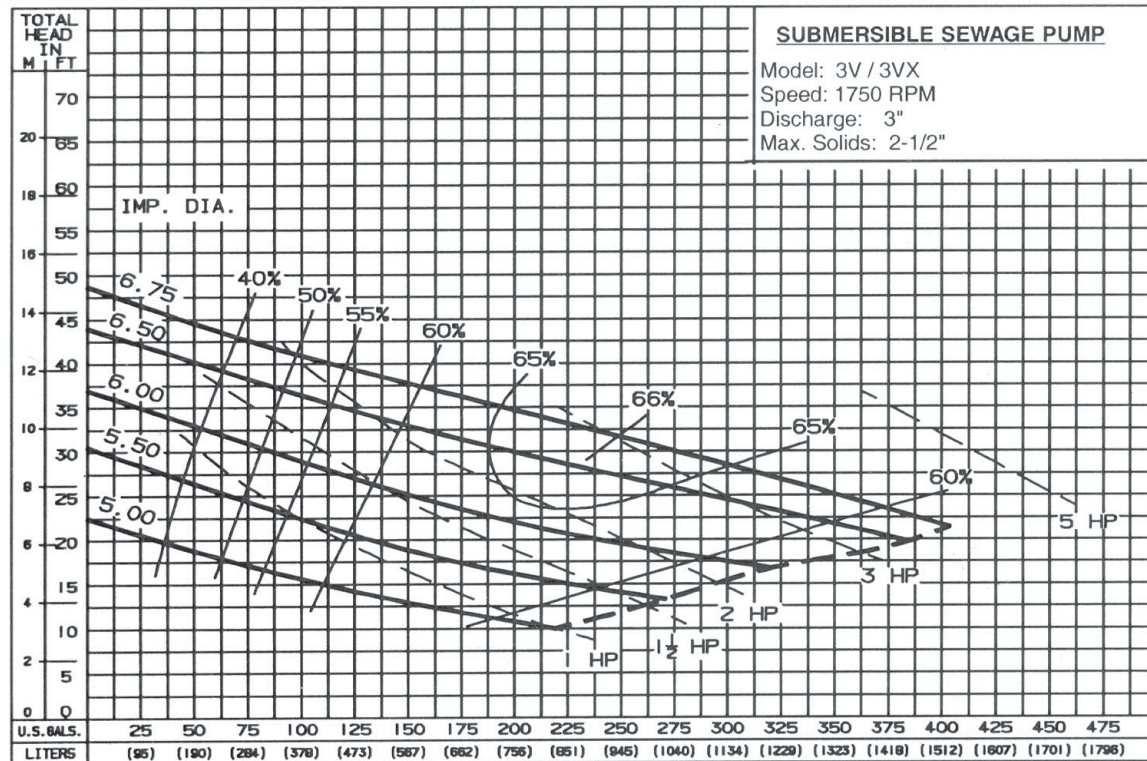

Pump performance is based on clear water (1.0 specific gravity @ 68°F) and pump fluid end (hydraulic) efficiency. Motor data based on 40°C ambient temperature.

Available Models				Motor Electrical Data											
Standard/X-Proof	HP	Volts	Phase	Hertz	Start Amps	Run Amps	Service Factor Amps	Run KW	Service Factor KW	Start KVA	Run KVA	NEC Code Letter	Service Factor		
3V/3VX10M4-21	1	230	1	60	50	8	10	1.2	1.6	11.5	1.8	J	1.2		
3V/3VX10M4-03	1	200	3	60	36	5.4	6.2	1.3	1.5	12.5	1.8	K	1.2		
3V/3VX10M4-23	1	230	3	60	32	4.5	5.4	1.2	1.5	12.7	1.8	K	1.2		
3V/3VX10M4-43	1	460	3	60	19	2.3	2.7	1.2	1.5	15.1	1.8	M	1.2		
3V/3VX10M4-53	1	575	3	60	13	1.8	2.2	1.2	1.5	12.7	1.8	J	1.2		
3V/3VX15M4-21	1.5	230	1	60	50	10	12	1.6	1.9	11.5	2.3	J	1.2		
3V/3VX15M4-03	1.5	200	3	60	36	6.6	8	1.6	1.9	12.5	2.2	K	1.2		
3V/3VX15M4-23	1.5	230	3	60	32	5.5	7	1.6	1.9	12.7	2.2	K	1.2		
3V/3VX15M4-43	1.5	460	3	60	19	2.8	3.5	1.6	1.9	15.1	2.2	M	1.2		
3V/3VX15M4-53	1.5	575	3	60	13	2.2	2.8	1.6	1.9	12.7	2.2	K	1.2		
3V/3VX20M4-01	2	200	1	60	78	15	18	2.1	2.5	15.6	3.0	J	1.2		
3V/3VX20M4-21	2	230	1	60	64	12	14.4	1.9	2.3	14.7	2.8	J	1.2		
3V/3VX20M4-03	2	200	3	60	44	8.4	9.8	1.8	2.3	15.2	2.8	J	1.2		
3V/3VX20M4-23	2	230	3	60	40	7	8.6	1.8	2.3	15.9	2.8	J	1.2		
3V/3VX20M4-43	2	460	3	60	23	3.5	4.3	1.8	2.3	18.3	2.8	L	1.2		
3V/3VX20M4-53	2	575	3	60	16	2.8	3.4	1.8	2.3	15.9	2.8	J	1.2		
3V/3VX30M4-21	3	230	1	60	101	21	26	2.5	3.0	23.2	4.8	J	1.2		
3V/3VX30M4-03	3	200	3	60	66	15	18	3.5	4.5	22.8	5.2	J	1.2		
3V/3VX30M4-23	3	230	3	60	58	12	15.6	3.5	4.5	23.1	4.8	J	1.2		
3V/3VX30M4-43	3	460	3	60	29	6	7.8	3.5	4.5	23.1	4.8	J	1.2		
3V/3VX30M4-53	3	575	3	60	21	5	6	3.5	4.5	20.9	5.0	H	1.2		
3V/3VX50M4-21	5	230	1	60	101	34	34	4.0	4.0	23.2	7.8	J	1.0		
3V/3VX50M4-03	5	200	3	60	66	24	24	6.0	6.0	22.8	8.3	J	1.0		
3V/3VX50M4-23	5	230	3	60	58	21	21	6.0	6.0	23.1	8.3	J	1.0		
3V/3VX50M4-43	5	460	3	60	29	10.5	10.5	6.0	6.0	32.1	8.3	J	1.0		
3V/3VX50M4-53	5	575	3	60	21	8.4	8.4	6.0	6.0	20.9	8.3	H	1.0		

Motor Efficiencies and Power Factor									
Motor Efficiency %						Power Factor %			
HP	Phase	Service Factor Load	100% Load	75% Load	50% Load	Service Factor Load	100% Load	75% Load	50% Load
1	1	68	64	58	49	68	66	60	50
1	3	70	66	60	51	70	67	61	47
1.5	1	69	68	65	59	69	68	61	48
1.5	3	71	70	68	60	70	70	62	49
2	1	73	73	71	68	70	69	63	50
2	3	71	70	68	61	66	65	52	42
3	1	70	70	67	59	51	51	49	45
3	3	74	73.5	69.5	61.5	72	70.5	62.5	52
5	1	70	70	69	65	51	51	50	47
5	3	74	74	72	67	72	72	64	58

3V and 3VX (EXPLOSION-PROOF)

SPECIFICATIONS

PUMP MODEL - Pump shall be Myers Model Number 3V Non-Clog Submersible Pump with 2 vane enclosed impeller. All openings in pump impeller and volute case shall be large enough to pass a 2" diameter sphere. Discharge flange shall be three (3) inch standard. 3VX pump and motor assembly shall be F.M. listed for Class 1, Group C & D explosion-proof service.

OPERATING CONDITIONS - Pump shall have a capacity of _____ GPM at a total head of _____ feet and shall use a _____ HP motor operating at _____ RPM.

MOTOR - Pump motor shall be of the sealed submersible type rated _____ HP at _____ RPM 60 Hertz. Motor shall be for single phase 230 volts _____ or three phase 200 volts _____, 230 volts _____, 460 volts _____, or 575 volts _____. Single phase motors shall be of the capacitor start, capacitor run, NEMA L type. Three phase motors shall be NEMA B type.

Stator winding shall be of the open type with Class F inverter duty insulation good for 155°C (311°F) maximum operating temperature. Winding housing shall be filled with a clean high dielectric oil that lubricates bearings and seals and transfers heat from windings and rotor to outer shell. Air-filled motors which do not have the superior heat dissipating capabilities of oil-filled motors shall not be considered equal.

Motor shall have two heavy duty ball bearings to support pump shaft and take radial and thrust loads and a sleeve guide bushing directly above the lower seal to take radial load and act as flame path for seal chamber. Ball bearings shall be designed for 50,000 hours B-10 life. Stator shall be heat shrunk into motor housing.

A heat sensor thermostat shall be attached to and imbedded in the winding and be connected in series with the motor starter contractor coil to stop motor if temperature of winding is more than 120°C (248°F). Thermostat to reset automatically when motor cools to safe operating temperature. Three heat sensors to be used on 3 phase motors. The common pump, motor shaft shall be of 416 stainless steel.

SEALS - Motor shall be protected by two mechanical seals mounted in tandem with a seal chamber between the seals. Seal chamber shall be oil filled to lubricate seal face and to transmit heat from shaft to outer shell.

Seal face shall be carbon and ceramic and lapped to a flatness of one light band. Lower seal faces shall be _____ carbide (optional).

A double electrode shall be mounted in the seal chamber to detect any water entering the chamber through the lower seal. Water in the chamber shall cause a red light to turn on at the control box. This signal shall not stop motor but shall act as a warning only, indicating service is required.

IMPELLER - The impeller shall be cast ductile iron and of the 2 vane non-clog enclosed type. Vane inlet tips shall be carefully rounded to prevent stringy material from catching in vanes. Pump-out vane shall be used in front and back chamber. Impeller shall be dynamically balanced. Impeller shall be driven by stainless steel shaft key and impeller held in place with lock screw and washer. Impeller and motor shall lift off of case as a unit without disturbing discharge piping.

PUMP CASE - The volute case shall be cast iron and have a flanged center line discharge. Discharge flange shall be 3" standard with bolt holes straddling center line. A bronze wear ring shall be pressed into case for guiding impeller neck and to prevent corrosion freeze up. Wear ring shall be held from rotating by locking with stainless steel set screw in end of ring.

PUMP AND MOTOR CASTING - All castings shall be of high tensile cast iron and shall be treated with phosphate and chromate rinse.

All fasteners shall be 302 stainless steel.

BEARING END CAP - Upper motor bearing cap shall be a separate casting for easy mounting and replacement.

POWER CABLES - Power cord and control cord shall be double sealed. The power and control conductor shall be single strand sealed with epoxy potting compound and then clamped in place with rubber seal bushing to seal outer jacket against leakage and to provide for strain pull. Cords shall withstand a pull of 300 pounds. 3VX to meet F.M. requirements.

Insulation of power and control cords shall be type SOOW. Both control and power cords shall have a green carrier ground conductor that attaches to motor frame.